

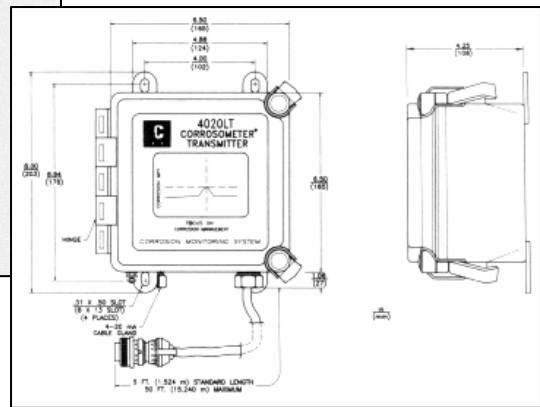


Model 4001L CORROSOMETER[®] System

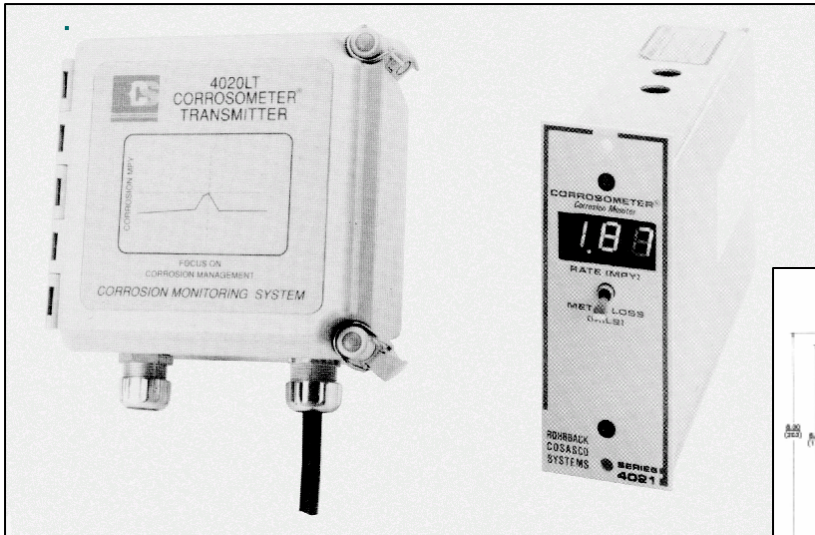

Features:

- **2-Wire Transmitter**
- **Intrinsically Safe**
- **Compatible with all Corrosometer Probes**
- **CE Compliant**
- **ATEX Compliant**

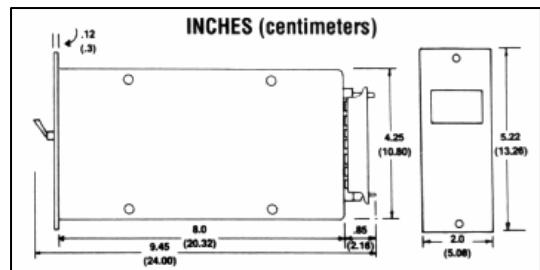

Single Channel System

The Model 4001L CORROSOMETER[®] transmitter and receiver system provides a single channel stand-alone system. The system incorporates the Model 4020LT two-wire transmitter and the Model 4021L receiver unit. The receiver unit is powered by 115 VAC or 230 VAC and provides the 24 VDC supply for powering the transmitter's 4-20 mA loop. In addition, the receiver processes the 4-20 mA signal to provide a direct digital readout of the cumulative metal loss and the CORROSOMETER[®] probe corrosion rate based on the last 48-hour monitoring period.

The Model 4020LT CORROSOMETER[®] transmitter is mounted close to the CORROSOMETER[®] probe. The transmitter has an integral 5-foot probe connection lead. Only a single twisted pair cable is required to connect the transmitter back to the receiver unit. The transmitter is approved intrinsically safe when used with the appropriate

safety barrier between the transmitter and receiver in the safe area, or non-incendive for use in Division 2, Zone 2, without a safety barrier.

The 4001L system is particularly useful where a process monitoring computer is not available or accessible. The system is ideally suited for plants where the CORROSOMETER[®] probes are separated by large distances. Transmitter to receiver distances up to 10,000 ft. with safety barriers are possible.

Alternatively, the transmitter/receiver combination may be used in process computer based systems to provide additional indication of metal loss and corrosion rate independent of the computer.

The letter "L" used in conjunction with this system indicates a linear 4-20 mA signal.

Specifications:

4001L SYSTEM

- **Input:** One CORROSOMETER® Probe
- **Maximum transmitter to receiver distance:** 10,000' (3,048 m)
- **Output:** Switch Selectable; 3-digit LED display; Metal loss mils or μ m or Rate mpy or μ mpy
- **Resolution:** ± 0.1 mpy or 0.01 mil
- **Voltage:** 115/230 50/60 Hz
- **Power Requirements:** 11 watts with max loop current

DEMKO Approved for Europe
 EEx ia IIC T4 – ATEX 94/9/EC *

*Requires the use of Safety barrier P/N 095776-702-1 if *probe* or transmitter is in Class 1 Division 1 area or Zone 0 or Zone 1.
 Protection type "nC" permits the use of the transmitter without the safety barrier provided *probe* and *transmitter* are in class 1 Division 2, or Zone 2 area.

4020LT TRANSMITTER

- **Operation Temp:** -18° to +60° C (0° to +140° F)
- **Weight:** 9.25 lbs. (4.2 kg)
- **Size:** 5.75" x 5.75" x 6.94" (14.6cm x 14.6cm x 17.63cm)
- **Hazardous Area Certifications**
 UL/ULc Class 1, Zone 1, Ex and AEx ia IIC T4 for USA and Canada*
 (UL/ULc Class 1, Div 1, Groups A,B,C,D, T4 for USA and Canada)*

- **CE:** Complies with all applicable EU Product Directives: EMC Directive 89/336/EEC
- **ATEX:** Complies with all applicable EU Product Directives: ATEX Directive 94/9/EC

4021L RECEIVER

- **Operating Temp:** 0° to +50° C (+32° to +122° F)
- **Weight:** 2 lbs. (.9 kg)
- **Size:** 2" x 5.23" x 9.5" (5.1cm x 13.3cm x 24cm)
- **Panel cutout:** 2" x 4.3" (5.1cm x 10.9cm)

Ordering Information:

Model	Description														
4001L	Corrosometer® Instrument System														
	<table border="1"> <thead> <tr> <th>Code</th> <th>Display Units</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>μ Meters = .001 mm</td> </tr> <tr> <td>2</td> <td>MILS = 0.001 in</td> </tr> </tbody> </table>	Code	Display Units	1	μ Meters = .001 mm	2	MILS = 0.001 in								
Code	Display Units														
1	μ Meters = .001 mm														
2	MILS = 0.001 in														
	<table border="1"> <thead> <tr> <th>Code</th> <th>Probe Element</th> </tr> </thead> <tbody> <tr> <td>W</td> <td>Group A: Wire</td> </tr> <tr> <td>TS</td> <td>Group B/C: Tube/Strip</td> </tr> <tr> <td>SP</td> <td>Group D: Special</td> </tr> </tbody> </table>	Code	Probe Element	W	Group A: Wire	TS	Group B/C: Tube/Strip	SP	Group D: Special						
Code	Probe Element														
W	Group A: Wire														
TS	Group B/C: Tube/Strip														
SP	Group D: Special														
	<table border="1"> <thead> <tr> <th>Code</th> <th>Probe Span/Life in mils</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>.002 Inches</td> </tr> <tr> <td>4</td> <td>.004 Inches</td> </tr> <tr> <td>5</td> <td>.005 Inches</td> </tr> <tr> <td>10</td> <td>.010 Inches</td> </tr> <tr> <td>20</td> <td>.020 Inches</td> </tr> <tr> <td>25</td> <td>.025 Inches</td> </tr> </tbody> </table>	Code	Probe Span/Life in mils	2	.002 Inches	4	.004 Inches	5	.005 Inches	10	.010 Inches	20	.020 Inches	25	.025 Inches
Code	Probe Span/Life in mils														
2	.002 Inches														
4	.004 Inches														
5	.005 Inches														
10	.010 Inches														
20	.020 Inches														
25	.025 Inches														
	<table border="1"> <thead> <tr> <th>Code</th> <th>Probe Connector</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Model: 2000, 2000G, 3000, 3000G, 3705</td> </tr> <tr> <td>B</td> <td>Model: 2500, 2600, 2600G, 2610, 2610G, 300, & ALL H.P. PROBES</td> </tr> <tr> <td>S</td> <td>Model: 3700</td> </tr> </tbody> </table>	Code	Probe Connector	A	Model: 2000, 2000G, 3000, 3000G, 3705	B	Model: 2500, 2600, 2600G, 2610, 2610G, 300, & ALL H.P. PROBES	S	Model: 3700						
Code	Probe Connector														
A	Model: 2000, 2000G, 3000, 3000G, 3705														
B	Model: 2500, 2600, 2600G, 2610, 2610G, 300, & ALL H.P. PROBES														
S	Model: 3700														
	<table border="1"> <thead> <tr> <th>Code</th> <th>Receiver Line Voltage</th> </tr> </thead> <tbody> <tr> <td>115</td> <td>115 VAC</td> </tr> <tr> <td>230</td> <td>230 VAC</td> </tr> </tbody> </table>	Code	Receiver Line Voltage	115	115 VAC	230	230 VAC								
Code	Receiver Line Voltage														
115	115 VAC														
230	230 VAC														
4001L	Example														
	<table border="1"> <tr> <td>2</td> <td>W</td> <td>10</td> <td>A</td> <td>230</td> </tr> </table>	2	W	10	A	230									
2	W	10	A	230											



Rohrback Cosasco Systems, Inc.
 11841 East Smith Avenue
 Santa Fe Springs, CA 90670, USA
 Tel: (1) 562-949-0123 Fax: (1) 562-949-3065
 US Toll Free: 800-635-6898
 E-Mail: sales@cosasco.com
 Web Site: www.cosasco.com



ISO 9001:2000
 Certificate No. FM 10694