


Model 6210 COSASCO[®] Retractable System Coupon Holders and Coupons

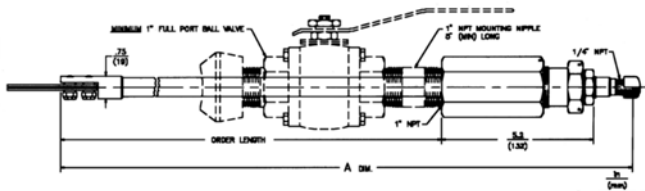

Order Length	"A" Dimension	
	Inches	mm
18	24.54	623
24	30.54	775
30	36.54	928
36	42.54	1080

Specifications:

- **Pressure Rating — 1500 PSI (10.3 MPa)**
- **Mounting — 1" Full Port Valve Minimum**
- **Temperature Rating — +500° F/+260° C**
- **Material — 316 SS**
- **Meets NACE MR0175 and MR0103**
- **Seal Material — Teflon[®]**

The Model 6210 Coupon Holder Assemblies provide a retractable means of coupon monitoring in processes at pressures up to 1500 PSI/10.3 MPa and temperatures up to 500° F/260° C. Insertion of the coupon holder can be adjusted to permit coupon positioning at precisely the desired point within the process. Standard lengths are available in 18, 24, 30 and 36 inches. The single tongue of

the coupon holder allows the use of one or two strip coupons, insulated or uninsulated. All coupon holders are supplied complete with mounting hardware for the coupons. A safety clamp assembly is recommended at pressures above 100 PSI and temperatures above +150° F.

Ordering Information for Model 6210:

Model	Retractable Coupon Holder		
6210	Complete Coupon Holder Assembly With 1" NPT Stuffing Box		
	Code	Order Length	
	18	18 Inches	
	24	24 Inches	
	30	30 Inches	
	36	36 Inches	
	Code	Safety Clamp Option (recommended over 100 PSI and 150° F)	
	0	No Safety Clamp	
	1	With Safety Clamp	
6210	18	1	← Example

Coupons

The Retractable Strip (RS) coupons are manufactured to the same standards as our 2" strip coupons (see 2" system coupon bulletin for specifications). Retractable strip coupons measure 1/16" TH x 1/2" W x 3" LG (.16 x 1.3 x 7.6 cm) with two mounting holes. The exposed surface area is 3.4 sq. in. (21.9 sq. cm.).

Ordering Information for Model CI:

Model	Retractable Coupon						
CI	Insulated Coupon Assembly						
	Code	Coupon Type					
	RS	Retractable Strip Coupon					
	Code	Alloy					
	G10180	1018 Carbon Steel					
	S30400	304 Stainless Steel					
	S31600	316 Stainless Steel					
	Code	Surface Finish					
	0	Grit Blast					
	1	Directional Sanded					
	Code	Insulators					
	0	Standard nylon insulators					
	1	High temperature ceramic insulators					
	2	Teflon [®] insulators					
	3	No insulators					
	Code	Handling					
	0	Preweighed insulators installed					
	1	Unweighed insulators shipped loose					
	Code	Special Options					
	0	None					
	1	Stamp Serial number on both sides					
CI	RS	G10180	0	0	0	0	← Example



Rohrback Cosasco Systems, Inc.
 11841 East Smith Avenue
 Santa Fe Springs, CA 90670, USA
 Tel: (1) 562-949-0123 Fax: (1) 562-949-3065
 US Toll Free: 800-635-6898
 E-Mail: sales@cosasco.com
 Web Site: www.cosasco.com

