

# COSASCO® SERVICE VALVE KIT

Request A Quote

RBS 6000

## Features

- **Meets NACE and MR0175 and MR0103**
- **Pressure Rating -6000 PSI (41.3 Mpa)**
- **By-Pass Bleed Valve Provides Safe Pressurization**
- **Complies with API 6FA and API 607 as a Fire-Safe Unit**
- **Seal Options Available for Temperature Rating up to +450°F (+232 °C)**



The complete Service Valve Kit includes the valve assembly with extension lever, brass hammer; spare face-to-access fitting o-ring, and a heavy duty field service box for safe, compact storage and easy portability.

Cosasco RBS 6000 Service Valve Kits are especially designed for use with Cosasco Access Fittings and RSL/RBS/RBSA Retrievers. Attached to the access fitting body, the valve is the control which allows the pressurized product to enter the retriever during insertion and removal of Cosasco Solid or Hollow Plug Assemblies. It also contains the pressurized product when the retriever is disconnected. Retriever and Service Valve hook-up is indicated in Figure 2.

Basically a ball-type valve with full-opening port, a special pressure equalizing port allows the operator to slowly release line pressure to the retriever. With pressure balanced on both sides of the ball, the valve can be operated without difficulty or torque problems, even on high pressure systems. The valve also incorporates a secondary special built-in vent to atmosphere valve allowing product bleed-off away from the operator for safety and cleanliness. With the aid of the optional

accessory diverter hose assembly, the bleed valve can also be used for product sampling, back-pressuring or for product or pressure relief.

Should the solid or hollow plug thread, packing, or o-ring become damaged, preventing service valve removal, a Service Valve Blanking Plug can be used to seal the open end of the valve. The Service Valve Blanking Plug, available as an optional accessory is mated to the acme threads of the service valve after removing the retriever. This provides a secondary seal for the valve. The Service Valve can then be left in place, completely sealing the access fitting until corrective repairs can be made at a later date.



COSASCO®

## Part Number and Dimensions

Description	NACE Part No.	HI-Temp
Service Valve Kit	601025	601031
Service Valve Assembly w/Extension	601026	
O-Ring 2-228 Viton	124642	
Brass Hammer	125137	
Field Service Box	210296	
<b>Weight &amp; Dimensions</b>		
Service Valve Face-toFace Dimension	10.00" (254 cm)	
Service Valve and End-to-End Dimension	11.625" (295.2 cm)	
Service Valve Assembly Weight	78.0 lb.	


Flanged valves, alternate materials, and high temperature valves are available on special order. Standard units are related for pressures up to 6000 PSI (41.3 MPa) at temperatures to +200 °F (+93 °C).

Description	Repair Kit NACE Trim P/N	Seal Kit Nace Trim P/N
Repair and Seal Kits consisting of:	601024	601023
Stem wiper ring, Molythane	Yes	Yes
Stem back-up ring, Teflon	Yes	Yes
Stem seal, Fluoromite w/Viton O-Ring	Yes	Yes
Stem O-Ring, Viton	Yes	Yes
Adapter face O-Ring, Viton	Yes	Yes
Adapter body O-Ring, Viton	Yes	Yes
Ball seal seal ring, Celcon (2)	Yes	Yes
Bleed adapter carrier seal, Viton	Yes	Yes
Bleed adapter carrier, 17-4 PH (2)	Yes	N/A
Ball, 17-4 PH	Yes	N/A
Bleed valve screw assembly, Viton (2)	Yes	N/A
Bleed valve seals, Viton (2)	Yes	Yes

## Optional Accessories

Description	Part Number
Service Valve Blanking Plub	127391-X4
Diverter Hose Assembly - 10 ft.	124669
Diverter Hose Assembly - 25 ft.	124931
Diverter Hose Assembly - 50 ft.	124685

Retriever and Service Valve Hook-up

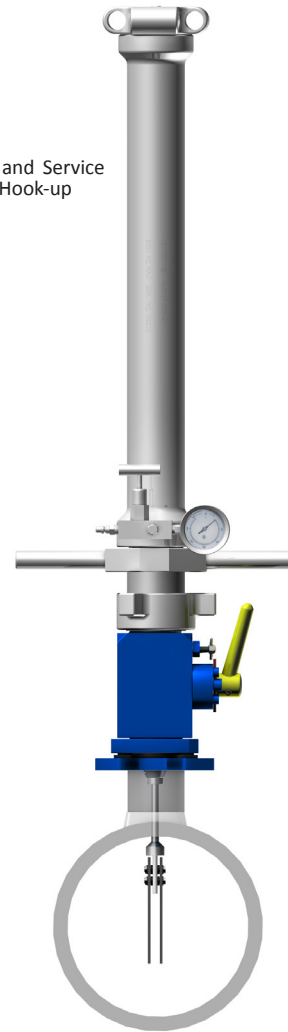

**Cosasco**  
 11841 Smith Avenue  
 Santa Fe Springs, CA 90670, USA  
 Tel: 1-562-949-0123  
 Email: sales@cosasco.com  
 Web Site: www.cosasco.com

©Rohrback Cosasco Systems, Inc. All rights reserved

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described wherein or their use or applicability. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.



FM 10694

RBS-6000-DS rev-A  
 Rev. Date 09/06/2017